



PLASTIC WATER TANKS

VERTICAL PVC TANKS

CAPACITY	DIMENSION		
	U.S. Gallon	Diameter (cm)	Height (cm)
35	55	75	25
50	65	85	25
100	75	98	35
150	86	120	35
200	96	127	35
300	110	144	35
400	120	165	46
500	130	175	46
600	138	184	46
800	152	204	46
900	158	206	46
1000	162	218	46
1500	197	215	46
2000	216	250	50
3000	239	300	50
5000	286	336	50

HORIZONTAL PVC TANKS

CAPACITY	DIMENSION			
	U.S. Gallon	Diameter (cm)	Length (cm)	Height (cm)
35	55	73	58	25
50	65	80	66	25
100	80	106	85	35
200	98	133	102	35
300	110	150	116	35
400	120	165	129	46
500	130	178	137	46
600	139	193	142	46
800	152	205	151	46
1000	165	224	168	46

FIBER GLASS TANKS

CAPACITY	DIMENSION		
	U.S. Gallon	Length (mm)	Height (mm)
100	750	750	750
150	900	850	900
200	1130	800	920
250	1400	1170	920
300	1360	1000	900
500	1930	1300	1260
800	2300	1700	1470
1000	2370	1480	1430
1500	2750	1620	1600
2000	2730	2040	2040
2500	3000	2200	2000
3000	3400	2160	2200
4000	4620	2200	2500
5000	5250	2400	2320
6000	5600	2550	2480
8000	3400	2160	2200
10,000	6300	2800	2800
12,000	7500	2800	2800
18,000	11,400	2800	2800
20,000	12,500	2800	2800
24,000	15,000	2800	2800



HOT PRESSED SECTIONAL PANEL TANKS

- ▶ GRP Hot Pressed Panels Insulated Tank
- ▶ All External/Above water line Bolts, Nuts, Washers of SS 316 A4 grade
- ▶ Internal Tie Rods of Stainless Steel 316 A4 grade
- ▶ Level Indicator
- ▶ Steel Skid Based
- ▶ GRP Internal Ladder, HDG External Ladder
- ▶ HDG External Supports
- ▶ PVC Foam sealant (Non-Toxic)
- ▶ GRP Manhole (600 mm opening) with cover
- ▶ GRP Air vent [100mm dia]
- ▶ Inlet, Outlet, Overflow & Drain: Include (1" to 3")



Virgin Plastic



100% UV Stabilized



Anti-Bacterial




FDA Grade



FDA Grade

Road Barriers

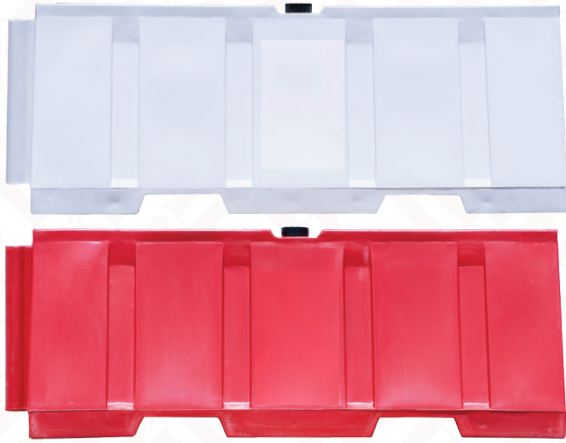

RANGE & SPECIFICATIONS

Height (cm)	Length (cm)	Top (cm)	Bottom (cm)	Water Inlet Diameter	Water Outlet Diameter
80	200	17	52	3	2


Traffic Cones



RANGE & SPECIFICATIONS

Diameter (cm)	Height (cm)	Description
480	100	PVC Traffic Cone with rubber base and white reflective sleeve.

Parquet Flooring

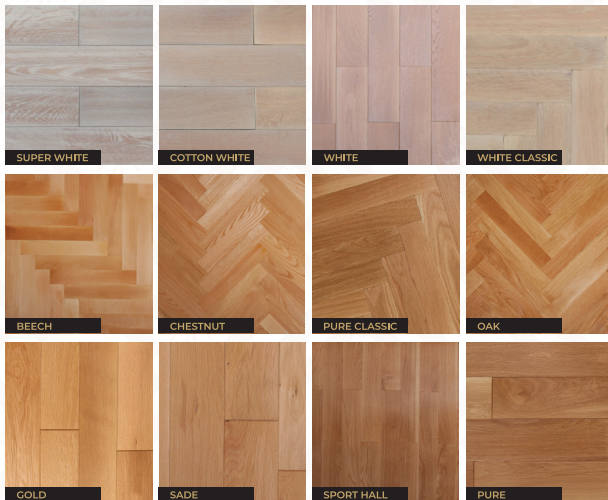

Water Pumps



Model:	fi 60
HP:	0.5 HP
Rated voltage:	240-220 V
Frequency:	50 Hz
Speed:	2880-2700 RPM
Max. Temperature:	90-60 °C
Max. Amps:	3.0-2.4 A
Max. Head:	32-27 m
Max. Watts:	600-450 W
IP Rating:	IP 44

Model:	fi 158
HP:	1 HP
Rated voltage:	240-220 V
Frequency:	50 Hz
Speed:	2880-2700 RPM
Max. Temperature:	95 - 60 °C
Max. Amps:	6.0 - 4.5 A
Max. Head:	30 - 25 m
Max. Watts:	1200 - 950 W
IP Rating:	IP 44

Other GRP Products



- ▶ GRP METER BOXES
- ▶ GRP LADDERS
- ▶ PLANTER BOXES
- ▶ LITTER BINS
- ▶ GRP CUSTOM MADE TANKS
- ▶ GRP MANHOLES

