

Genetron® 134a

Introduction

Genetron® 134a (HFC-134a) has been developed by Honeywell to serve as one of the key substitutes for CFCs and HCFCs. Genetron® 134a is a long-term, environmentally safer, non-ozone depleting substitute. As a refrigerant, it possesses similar energy efficiency and capacity characteristics as R-12 and has an intrinsically low toxicity. Genetron® 134a is the refrigerant of choice in automobile air-conditioning. It may be used in residential and commercial refrigeration, as well as commercial, and industrial air-conditioning.



Physical properties

Component:	Chemical name:	Molecular formula:
HFC-134a	1,1,1,2 Tetrafluoroethane	CH ₂ FCF ₃
Molecular weight		102.03
Boiling point ^{iv} (°C)		-25.9
Freezing point ^{iv} (°C)		-96.6
Critical temperature ⁱ (°C)		101.06
Critical pressure (kPa)		4059
Critical volume ⁱ (m ³ /kg)		0.002
Critical density ⁱ (kg/m ³)		511.9
Vapour density at boiling point (kg/m ³)		5.26
Liquid density ⁱⁱⁱ (kg/m ³)		1207.0
Liquid heat capacity ⁱⁱⁱ (kJ/kg·°K)		1.425
Vapour heat capacity ^{iii,iv} (kJ/kg·°K)		0.851
Heat of vaporization at boiling point (kJ/kg)		216.98
Vapour pressure ⁱⁱⁱ (kPa)		665.0
Liquid thermal conductivity ⁱⁱⁱ (W/m·°K)		0.081
Vapour thermal conductivity ⁱⁱⁱ (W/m·°K)		0.0138
Liquid viscosity ⁱⁱⁱ (µPa·sec)		197.9
Vapour viscosity ⁱⁱⁱ (µPa·sec)		11.8
% Volatiles by volume		100
Solubility of Genetron® 134a in water (wt.%)		0.15
Solubility of water in Genetron® 134a (wt.%)		0.11
Flammability limits in air (vol.%)		None ⁱⁱ
Auto ignition temperature (°C)		770
Ozone Depletion Potential (ODP-R11=1)		0

Pressure/Temperature table

Temperature (°C)	Pressure (kPa)
-40.0	51
-35.0	66
-30.0	84
-25.0	106
-20.0	133
-15.0	164
-10.0	201
-5.0	243
-0.0	293
5.0	350
10.0	415
15.0	488
20.0	572
25.0	665
30.0	770
35.0	887
40.0	1017
45.0	1160
50.0	1318

ⁱ Relprop v6.01 (NIST)

ⁱⁱ Flame limits measured using ASTM E681 with electrically activated kitchen ignition source per ASHRAE Standard 34.

ⁱⁱⁱ All data are at 25°C unless noted otherwise

^{iv} at 101.3 kPa

Compatibility with plastics and elastomers

The table below is a summary of materials compatibility data resulting from tests performed by Honeywell and other worldwide industry organisations. Since there are many different grades and

formulations of these materials, we recommend that compatibility testing be performed on the specific grade of materials under consideration when designing new systems. This data should be used only as a guide to the compatibility of materials with Genetron® 134a.

Compatibility with plastics and elastomers

Material	Genetron® 134a	Genetron® 134a/PAG	Genetron® 134a/Polyol Esters
Ethylene Propylene Diene Terpolymer	S	S	S
Ethylene-Propylene copolymer	S	S	S
Chlorosulfonated Polyethylene	S	Us	Us
Polyisoprene	S	Su	U
Chlorinated Polyethylene	Su	Su	Us
Neoprene (Chloroprene)	S	S	Su
Epichlorohydrin	S	Su	Us
Polyvinylidene Fluoride and copolymer of Vinylidene Fluoride and Hexafluoropropylene	U	S	Us
Silicone	Us	S	Su
Polyurethane	S	U	Su
Nitrile	Su	Su	Su
H-NBR	S	Su	S
Butyl rubber	S	S	Su
Natural rubber	Su	U	U
Polysulfide	S	U	U
Nylon	S	Su	Su
Polytetrafluoroethylene	S	S	S
PEEK	S	S	S
ABS	S	U	U
Polypropylene	Su	Su	S
Polyphenylene Sulfide	Su	U	Su
Polyethylene Terephthalate	S	U	S
Polysulfone	S	Us	S
Polyimide	S	Su	Su
Polyetherimide	S	Su	S
Polyphthalamide	S	U	U
Polyamideimide	S	S	S
Acetal	S	U	U
Phenolic	S	S	Su
Epoxy resin	S	S	S

S: Suitable

Su: Suitable with some exceptions

U: unsuitable

Us: Unsuitable with some exceptions

The rankings in the table should be used with caution since they are judgements based on limited samplings.

Customers should consult with the manufacturer or conduct further independent testing.

Applications

Refrigeration and air-conditioning

In the automotive industry, manufacturers are using Genetron® 134a in the air-conditioning systems of all vehicles.


Genetron® 134a has been developed for a number of refrigeration applications including supermarket cases, walk-in coolers and home refrigerators.

Genetron® 134a is also being used in some centrifugal chillers.

Genetron® 134a is suitable for both new equipment and for retrofitting existing R-12 commercial refrigeration systems. Generally, there will be few equipment design changes necessary to optimise the performance of Genetron® 134a in these applications. For retrofitting commercial refrigeration systems, refer to Genetron® 134a retrofitting guidelines.

Solubility of water in Genetron® 134a

The solubility of water in Genetron® 134a is shown in the graph below. This solubility is comparable to that of water in Genetron® 22.

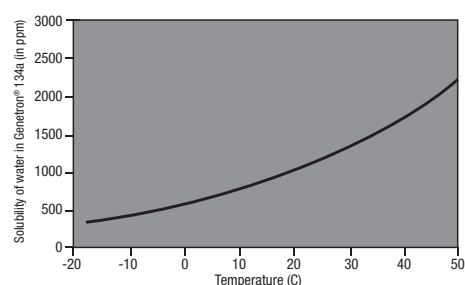

Lubricants

Genetron® 134a is being used with polyalkylene glycol (PAG) and with polyol ester lubricants. Most automotive original equipment manufacturers have chosen specific PAG lubricants for their systems. For non-automotive applications, most compressor manufacturers are recommending specific polyol ester lubricants. Users should check with the equipment manufacturer for the recommended lubricants for their system.

Safety

Honeywell recommends reading the Material Safety Data Sheet (MSDS) before using Genetron® 134a.

Toxicity

Genetron® 134a can be safely used in all of its intended applications, based on data developed by the Program for Alternative Fluorocarbon Toxicity Testing (PAFT 1).

Leaks

If a large release of Genetron® 134a vapour occurs, the area should be evacuated immediately. Vapours may concentrate near the floor, displacing available oxygen. Once the area is evacuated, it must be ventilated using blowers or fans to circulate the air at floor-level.

Flammability

According to ASHRAE Standard 34, Genetron® 134a is classified in safety group A1, i.e., it is nonflammable at 1 atm. pressure (101.3 kPa) and 18°C.

Leak detection

Use leak detectors for pinpointing leaks or for monitoring an entire room on a continual basis. Leak detection is important for refrigerant conservation, equipment protection and performance, reduction of emission and protection of those coming in contact with the system. Never use air to perform leak detection.

Storage and handling

Bulk and cylinder

Genetron® 134a cylinders must be clearly marked and kept in a cool, dry and properly ventilated storage area away from heat, flames, corrosive chemicals, fumes, explosives — and be otherwise protected from damage. Under no circumstances should an empty cylinder be refilled with anything other than virgin product. Once empty, properly close the cylinder valve and replace the valve cap. Return empty cylinders to your Honeywell distributor.

Cylinders of Genetron® 134a should be kept out of direct sunlight, especially in warm weather. Liquid Genetron® 134a expands significantly when heated, reducing the amount of vapour space left in the cylinder. Once the cylinder becomes liquid-full, any further rise in temperature can cause it to burst, potentially resulting in severe personal injury. Never allow a cylinder to get warmer than 52°C.

Vessels, containers, transfer lines, pumps and other equipment used with Genetron® 134a should not be exposed

to high-temperature sources (such as welding, brazing and open flames) until they have been thoroughly cleaned and found free of vapours or liquid. Cylinders must never be exposed to welding, brazing or open flames. Exposure to high temperatures can cause fire, explosion and decomposition of Genetron® 134a. This may result in the formation of toxic or corrosive compounds.

When possible, maintenance or cleaning of equipment should be performed without entering the vessel. If a tank or any confined space must be entered, then formal confined space entry procedures must be followed. These procedures require that a fully qualified work team be used and a confined space entry form be completed and placed at the job site.



Available literature


Honeywell has a wide range of literature available on topics including: retrofitting procedures, product specifications and product descriptions.

Please ask for Honeywell's software package containing Refrigerant Properties, Cycle Analysis and Pipe Sizing.

All literature and information can be found at:
www.honeywellrefrigerants.com

Pressure-Enthalpy Diagram

Genetron® 134a-SI

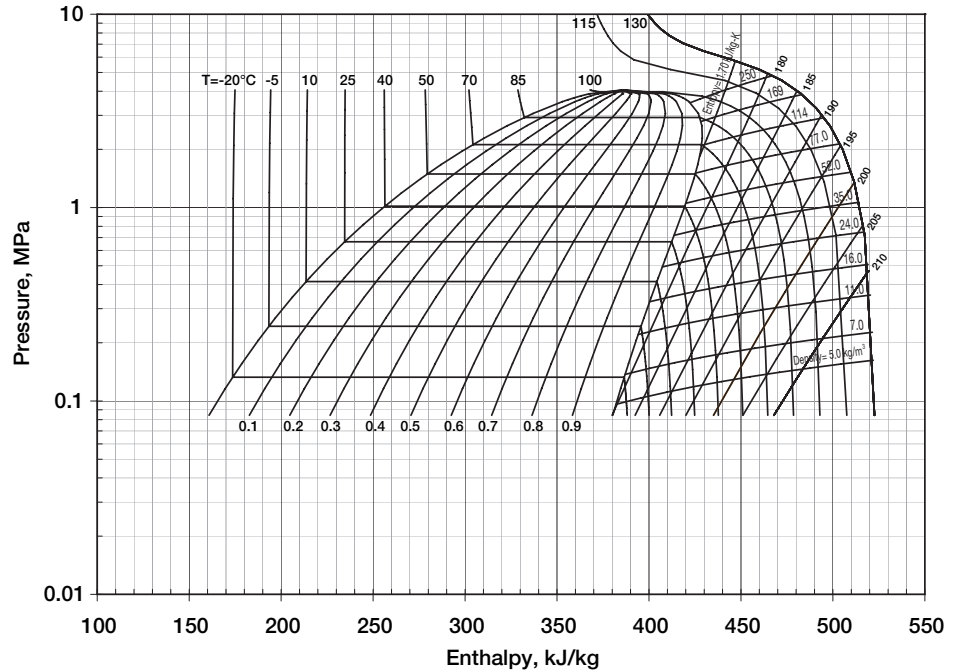

Disclaimer

Although all statements and information contained herein are believed to be accurate and reliable, they are presented without guarantee or warranty of any kind, express or implied. Information provided herein does not relieve the user from the responsibility of carrying out its own tests and experiments, and the user assumes all risks and liability for use of the information and results obtained. Statements or suggestions concerning the use of materials and processes are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all toxicity data and safety measures are indicated herein or that other measures may not be required.

Honeywell Fluorine Products Europe B.V.

Laarderhoogtweg 18
1101 EA Amsterdam
The Netherlands

Honeywell Belgium N.V.

Haasrode Research Park,
Grauwmeer 1
B-3001 Heverlee
Belgium

Tel: +32 16-391 278

Fax: +32 16-391 277

Distributed by



www.anbisolutions.com

Honeywell