

8991

Brass Strainer



Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com



Brass strainer
Threaded F/F (ISO 228/1)
Stainless steel strainer
(Mesh 500µm for DN≤50, 600µm for DN65/DN80, 800µm for DN100)
TR CU 010 compliant

PN20 (PN16 for DN100)
Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)

Working conditions


- Suitable for: water, 0°C to +80°C
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/UE)



PARTLIST

N.	Part	Material	Norm
1	Body	Brass	EN12165 CW617N
3	Strainer	Stainless steel ¹	AISI 302
4	Gasket	Fiber	-
2	Bonnet	Brass ¹	EN12165 CW617N

¹For DN100 AISI 304 strainer and NBR gasket

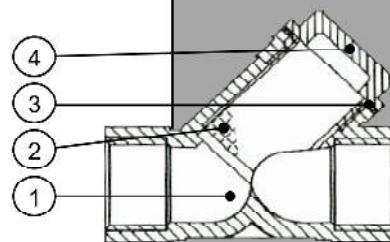

DIMENSIONS

DN	G	H [mm]	A [mm]	Weight [g]
008	1/4"	40	55	110
010	3/8"	40	55	115
015	1/2"	40	58	140
020	3/4"	50	70	210
025	1"	60	75	330
032	1 1/4"	68	96	580
040	1 1/2"	75	106	850
050	2"	90	126	1400
065	2 1/2"	100	146	2800
080	3"	118	166	3100
100	4"	172	218	4900

